TORMIN ZY8106 LED Light

IP 66

Ta 40

Ta -40



Characteristic

■ The lamp is designed with a snap-on quick-opening cap anti-fall structure for easy installation and maintenance.

■ Use high-end brand outdoor dedicated power supply, wide input range, constant current and constant voltage output, high power factor, high efficiency, dual-stage PFC, anti-lightning surge, to ensure long-term stable and efficient output of lamps.

Application

The lamp has high anti-corrosion and anti-seismic ability and the protection level reaches IP66, which is for various harsh industrial operating environments such as dust, rain and fog, sea waves, etc.

Suitable for outdoor lighting, supplementary lighting in workshops, equipment key lighting etc.


Main specification


Item	Technical Parameters
Input voltage	90~264VAC
Rated frequency	50Hz / 60Hz
Rated wattage	50W~200W
Light source	LED
Life time	50000h
CRI	Ra 70
CCT	5000K

Ordering Reference


Model number	Rated wattage (W)	Light output (lm)	Net weight (kg)	Mounting height	Dimension(mm)	Equivalent to MH
ZY8106-L50	50	>6,000	3.2	8~12m	311(L)X220(W)X50(H)	100W
ZY8106-L100	100	>12,000	3.5		403(L)X295(W)X60(H)	250W
ZY8106-L150	150	>16,800	4.4		431(L)X330(W)X60(H)	400W
ZY8106-L180	180	>21,600	5.9		471(L)X360(W)X60(H)	>400W
ZY8106-L200	200	>23,000	5.9		471(L)X360(W)X60(H)	400W~600W

Drawing of dimension (Dimension in mm)

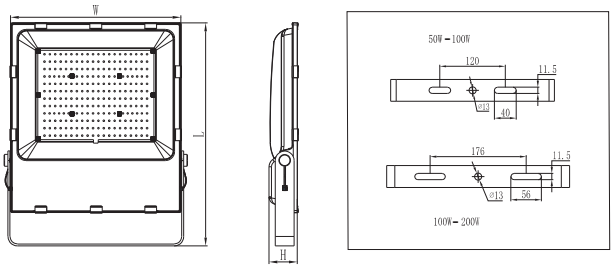




seat mouting



side wall mounting



celling mounting