ZY8109B LED Floodlight

TORMIN

IP 65



Implementation Standards: GB7000/GB17625/GB17743


Application

This product is widely used in outdoor squares and other open-air places lighting, and is also suitable for non-corrosive production workshops as supplementary lighting.

Characteristics

- Fully die-cast split structure, long life, high structural strength;
- Tempered glass lens, excellent light transmittance and good weather resistance;
- The power compartment can be opened separately, which makes installation and maintenance more convenient;
- The angle is flexible and adjustable, suitable for different lighting needs;
- Protection level IP65, suitable for various outdoor environments.

Light distribution curve

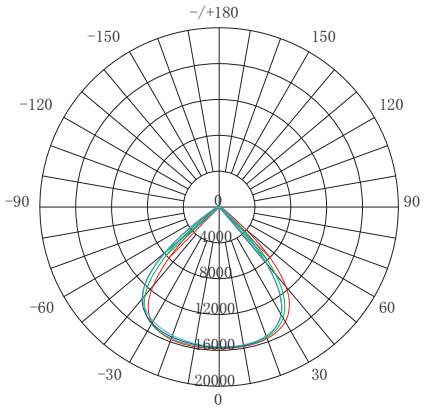

Average beam angle (50%) 90°

Main Specification

Item	Technical Parameter
Input voltage range	90~264VAC
Rated frequency	50Hz / 60Hz
Rated wattage	100W~300W
Light source	LED
CRI	70(80 optional)
CCT	5000K
Light source lifetime	100,000hrs
Beam angle	60°/90°/120°
Leading-in cable outer diameter	ϕ8mm~ϕ14mm

Ordering Reference

Model number	Rated Wattage	Light output(lm)	Space height rate	Mounting height(m)	Net weight (Kg)	Dimensions (mm)	Equivalent to MH
ZY8109B-L100	100W	>13500	1.25	3~5	4	389(L)×297(W)×57(H)	250W
ZY8109B-L150	150W	>20250		5~10	4.5	437(L)×346(W)×57(H)	300W
ZY8109B-L200	200W	>27000		8~15	6.2	493(L)×379(W)×57(H)	400W
ZY8109B-L300	300W	>40500		10~25	9.5	582(L)×444(W)×60(H)	600W

ZY8109B LED Floodlight

Installation And Selection

