
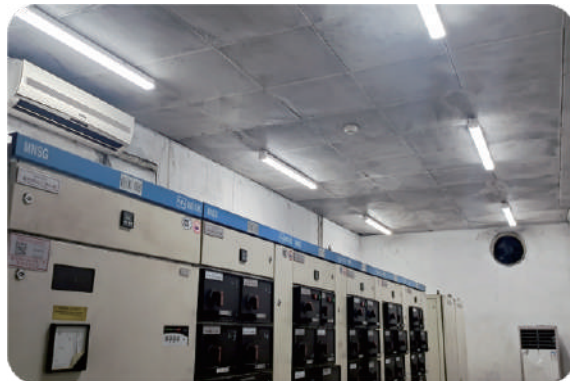


IP
66

Light Distribution Curve

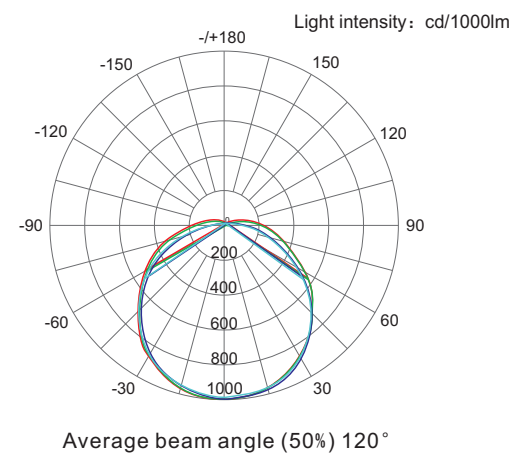

Application

This product is widely used in offices, control rooms, conference rooms, lounges, power distribution rooms, pipe gallery warehouses, power warehouses, cable tunnels, warehouses;

It is suitable for places with high moisture and corrosion protection levels.

Characteristics

- The shell is made of imported polycarbonate (two-color injection molding, not only permanent dustproof and waterproof, but also high strength, corrosion resistance, anti-photoaging, etc.
- The translucent cover is made of non-transparent optical grade diffusing material and has a large output of flexible light output, no glare, no blue light hazard.
- The overall lighting efficiency is as high as 100lm/W, which is more than 60% energy saving compared to the metal halide lamp.
- The whole lamp protection grade is IP66, which can be applied to various indoor and outdoor sand dust or rain and fog, wave environment.
- Can be equipped with the built-in emergency module, 3W/60min, emergency lighting or pure emergency.



Main Specification

Item	Technical Parameters
Rated voltage (V)	90~264VAC
Rated frequency	50Hz / 60Hz
Life time (h)	50,000
CCT	5000K (3000K/4000K Optional)
CRI	Ra 80
Leading-in cable diameter	Suitable for $\phi 6\text{mm} \sim \phi 8\text{mm}$
Net weight (kg)	0.72(18W); 1.2(36W); 1.5kg(48W)

Ordering Reference


Ordering Reference	Rated wattage (W)	Lighting output(lm)	Space height ratio	Mounting height(m)
ZY5321-L18	18	1800	1.75	2~6
ZY5321-L36	36	3960		
ZY5321-L48	48	5190		
For the emergency type, add "J" after the item no,such as ZY5321J				

Installation Method

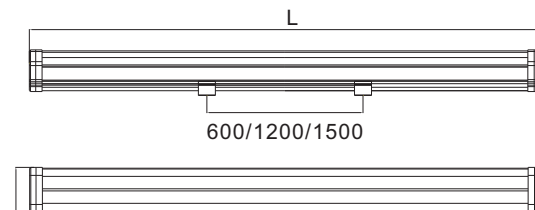


Installation size

Order No.	L(mm)	W(mm)	H(mm)	LF(mm)
ZY5321-L18	656	75	72	600
ZY5321-L36	1256	75	72	1200
ZY5321-L48	1556	75	72	1500



Ceiling mounting (x)

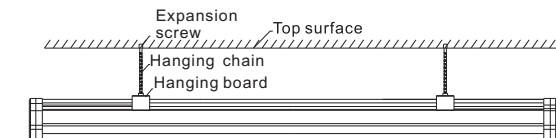

Hanging chain mounting (L)