

ZY8605A LED Light

TORMIN

IP
65

Ta
45

Ta
-40



Application

Suitable for power plants, steel mills, chemical plants and other indoor and outdoor lighting.




Characteristics

- Using high-tech surface coating technology, wear-resistant and anti-corrosion, waterproof and dustproof, suitable for a variety of harsh environments;
- Radiator with a full range of self-cycle design, effective guarantee long-term use for high temperature and humidity operating environment.
- Variety of installation types, same shape, an effective solution to beautify workshop and device platform.
- Lamps with imported light source, no dark spot, the average light efficiency of whole light up to 110lm / W, energy-saving is 60% more than metal halide light.
- Power supply with AC and DC wide voltage constant power, power factor up to 0.98.
- The light fixture is equipped with an angle locking device, to ensure that the illumination direction is not displaced in the vibration environment.

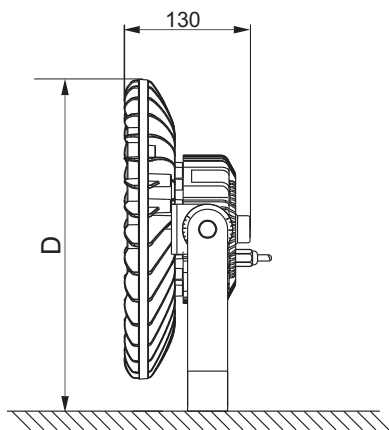
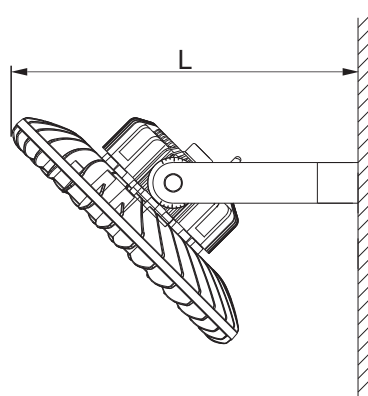
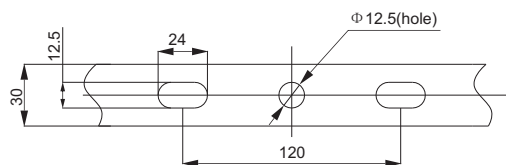
Main Specification

Item	Technical Parameters
Input voltage range (V)	90 ~ 305VAC
Rated frequency	50Hz / 60Hz
Light source	LED
Life time (h)	50,000
CRI	Ra 70 (80 optional)
CCT	5000K(3000K/4000K optional)
Dimension (mm)	332×340×130 (80W/ 100W/ 120W)
	352×360×130 (150W/ 200W)
Net Weight (kg)	3.2 (80W/ 100W/ 120W); 4.5 (150W/ 200W)

Ordering Reference

Model number	Picture	Rated wattage (W)	Light output (lm)	Space height ratio	Mounting height(m)	Light distribution curve(1000cd/lm)	Equivalent to MH
ZY8605A-L80-50°		80W	9150	/	/		> 150W
ZY8605A-L100-50°		100W	10760				250W
ZY8605A-L120-50°		120W	12400				> 250W
ZY8605A-L150-60°		150W	17450				400W
ZY8605A-L200-60°		200W	21700				400W~600W

Model number	Picture	Rated wattage (W)	Light output (lm)	Space height ratio	Mounting height(m)	Light distribution curve(1000cd/lm)	Equivalent to
							MH
ZY8605A-L150-90°		150W	17450	/	/		400W
ZY8605A-L200-90°		200W	21700				400W~600W

Drawing of dimension (Dimensions in mm)

Seat mounting

Side wall mounting

Installation dimensions

Order number	Rated Wattage (W)	D(mm)	L(mm)
ZY8605A	150W/200W	352	360
ZY8605A	80W/100W/120W	332	340